+91 78660 03362 | +91 0353-3136868
info@youthofindia.org.in
youthofindia.org.in
Hotel Lemon Tree, 1st Floor, Sevoke Road,
Siliguri, West Bengal - 734008

Ref. No.: YoI/HQ/2026/AG/SEP/2609/266

Interested and eligible vendors are invited to submit quotations strictly as per the prescribed specifications mentioned below. For any clarification or assistance, please contact: 7866003362

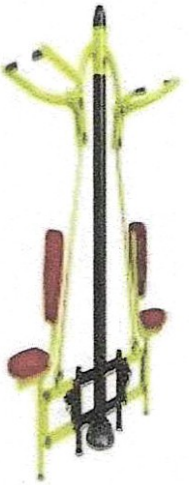
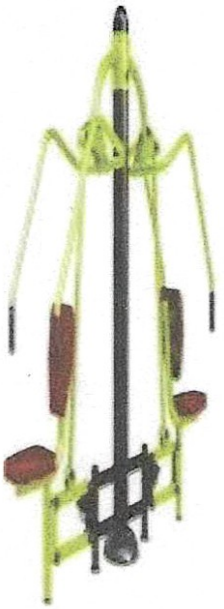
Open Gym Equipment Consisting of 10 + 1 Equipment

S/N	Description	Picture
1.	**AIR WALKER DIMENSIONS:** 1000 mm (Length) x 300 mm (Width) x 1200 mm (Height). 'Providing and fixing Air Walker made from 'A' Class Medium GI Pipe. The centre pipe is of 80mm NB made from 'A' Class Medium GI Pipe, and the bottom support of M.S. round plate of 250 mm dia & 10mm thickness is welded at bottom. The leg movement frame is of 40mm NB made from 'A' Class Medium GI Pipe. The handle frame is of 25mm NB made from 'A' Class Medium GI Pipe. To join the centre pipe & leg movement frame seamless pipe of 60 mm diameter & 3mm thickness & 25mm diameter solid bar is used. The bending M.S. plate is used to join the centre pipe & leg movement frame is of 6mm thickness. The footrests are made from FRP/C.I./Aluminium casting material, its sizes are 130mm X 300mm X 5mm. For the support M.S. plate of 280 mm x 130 mm x 8 mm thickness is used. Closing Caps made from top Quality FRP material with 2 mm thickness. The pins used are made up of 25mm diameter bright bar. The bearings used are '6205' permanent lubricated sealed bearing of reputed make. The nut bolts used for assembly are made from S.S. material. The circlips used for assembly are of 25 mm diameter. The equipment is fixed on ground with cement concrete and J shaped welded bolts of 18 mm thickness and painting is done by attractive colour spraying after proper surface treatment, shot blasting and initial coat of yellow primer surface is applied before top coat. The top coat is done using the best quality brand paint or duly powder coated. All equipment shall be 3rd party quality certified by International Testing Laboratory Govt. of India approved MSME. Outdoor Gym Equipment must confirm DIN 79000 and EN 16630, CE Certified, I.S.O. 9001:2015 Quality Management System, I.S.O. 14001:2014 Environment Management Systems for quality/design standard.	
2.	**BOARD I AIR SWING DIMENSIONS: - 800 mm (Length) x 400 mm (Width) x 1200 mm (Height).** 'Providing and fixing Surf Board made from 'A' Class Medium GI Pipe. The centre pipe is of 100mm NB made from 'A' Class Medium GI Pipe, and the bottom support of M.S. plate of 250 mm diameter & 10mm thickness is welded at bottom. The handle frame is of 40mm NB & 25mm NB made from 'A' Class Medium GI Pipe. The movement frame is made up of 50mm NB 'A' Class Medium GI Pipe. To join the centre pipe & handle frame seamless pipe of 130mm diameter & 3mm thickness is used. For the movement, bushes are used & for it 60mm diameter with 3mm thickness & 60mm solid bar is used. The footrests is made from FRP/C.I./Aluminium casting material, its sizes are 320mm X 270mm & 5mm thickness. For support of footrest is 200mm X 250mm with 5mm thickness M.S. Plate of 280 mm x 130 mm x 5 mm thickness is used. Closing Caps made from top quality FRP material which is of 2 mm thickness. The pins used are made up of 25 mm diameter Hardened bright bar. The bearing used are of '6205' permanent lubricated sealed bearing of reputed make. The handles used are of Rubber grip. The Nut Bolts used for assembly is made from S.S. material. The bushes (Stopper) used to avoid the collusion made from Polyurethane Plastic material of 50 mm dia. The circlips used for assembly is of 25 mm dia. The equipment is fixed on ground with cement concrete and J shaped welded bolts of 18 mm thickness and painting is done by attractive colour spraying after proper surface treatment, shot blasting and initial coat of yellow primer surface is applied before top coat. The top coat is done using the best quality brand paint or duly powder coated. All equipment shall be 3rd party quality certified by International Testing Laboratory Govt. of India approved MSME. Outdoor Gym Equipment must confirm DIN 79000 and EN 16630, CE Certified, I.S.O.	

YOUTH OF INDIA
सत्यम् ऋतम् बृहत्
+91 78660 03362 | +91 0353-3136868
info@youthofindia.org.in
youthofindia.org.in
Hotel Lemon Tree, 1st Floor, Sevoke Road, Siliguri, West Bengal - 734008

	9001:2015 Quality Management System, I.S.O. 14001:2014 Environment Management Systems for quality/design standard.	
3.	**HORSE RIDER 1080 mm (Length) x 500 mm (Width) x 1105 mm (Height)** Providing and fixing Horse rider made from 'A' class GI Pipe. The main frame of 60mm made from 'A' Class GI Pipe and the bottom support of M.S. round plate of 250mm & 10mm thickness is welded at bottom. The leg movement frame is of 40mm made from 'A' Class GI Pipe. The handle frame is of 32mm made from A Class GI Pipe. The footrests are made from FRP/C.I.I. Aluminium casting material, its sizes are 130mm X 310mm X 5mm. For the support M. S. plate of 280 mm x 130 mm x 5 mm thickness is used. Closing Caps made from top quality FRP material with 2 mm thickness. The pins used are made up of 25mm bright bar. The bearings used are 6205zz permanent lubricated sealed bearing of reputed make (SKF/FAG). High tensile steel with galvanized nut bolts is used for assembly. The circlips used for assembly are of 25 mm. The powder coat is done by Polyurethane & Epoxy powder with 60 - 70 -micron thickness. All equipment shall be 3rd party quality certified by International Testing Laboratory Govt. of India approved MSME. Outdoor Gym Equipment must confirm DIN 79000 and EN 16630, CE Certified, I.S.O. 9001:2015 Quality Management System, I.S.O.14001:2014 Environment Management Systems for quality/design standard.	
4.	**LEG PRESS DIMENSIION 894mm (Length) x 853mm (Width) x 1203mm (Height). SAFE AREA: - 1.2 m x 3 m** Providing and fixing Leg Press made from 'A' Class Medium GI Pipe. The centre pipe is of 100mm NB made from 'A' Class Medium GI Pipe, and the bottom support of M.S. Round plate of 250 mm diameter & 10mm thickness is welded at bottom. The remaining outer frame is of 40mm NB made from 'A' Class Medium GI Pipe. To join the centre pipe & outer frame seamless pipe of 130mm diameter & 3mm thickness is used. The seats are fitted on the outer frame is made up of FRP material of size 330mm X 330mm of thickness 3mm & M.S. Plate of thickness 5mm and Size 250mm X 200mm is used to support it. The footrests are made from FRP/C.I.I. Aluminium casting material, its sizes are 130mm X 300mm & 5mm thickness. The frame of footrests consists of 25 NB made from 'A' Class Medium GI Pipe. Closing caps made from top quality FRP material which is of 2mm thickness. The inner bushes are made from seamless pipe, its diameter is 60mm & 8mm thickness. The pins used in are made up of 25mm diameter hardened bright bar. The bearings used are of '6205' permanent angle don by attractive colour spraying after proper surface treatment, shot blasting and initial coat of yellow primer surface is applied before top coat. The top coat is done using the best quality brand paint or duly powder coated. To join the centre pipe & outer frame seamless pipe of 130 mm diameter & 3mm thickness is used. The seats are fitted on the outer frame is made up of FRP material of size 330 mm X 330 mm of thickness 3 mm & M.S. Plate of thickness 5mm and Size 250mm X 200mm is used to support it. The footrests are made from FRP/ C.I./Aluminium casting material, its sizes are 130mm X 300mm & 5mm thickness. M. S. plate of 280 mm x 130 mm x 5 mm thickness is used. Closing caps made from top quality FRP material which is of 2mm thickness. The inner bushes are made from seamless pipe, its diameter is 60mm & 8mm thickness. The pins used in are made up of 25mm diameter hardened bright bar. The bearings used are of '6205' permanent lubricated sealed bearing of reputed make. The handles used are of Rubber grip. The Nut Bolts used for assembly are made from S.S. material. The bushes (stopper) used to avoid the collusion made from Polyurethane Plastic material of 50mm diameter. The circlips for assembly are of 25mm diameter. The equipment is fixed on ground with cement concrete and J shaped welded bolts of 18 mm thickness and painting is lubricated sealed bearing of reputed make. The handles used are of Rubber grip. The Nut Bolts used for assembly are made from S.S. material. The bushes (stopper) used to avoid the collusion made from Polyurethane Plastic material of 50 mm diameter. The circlips for assembly are of 25mm diameter. The Foundation pipes are embedded in C.C. stock and paintings. All equipment shall be 3rd party quality certified by International Testing Laboratory Govt. of India approved MSME. Outdoor Gym Equipment must confirm DIN 79000 and EN 16630, CE Certified, I.S.O. 9001:2015 Quality Management System, I.S.O. 14001:2014 Environment Management Systems for quality/design standard.	

+91 78660 03362 | +91 0353-3136868
info@youthofindia.org.in
youthofindia.org.in
Hotel Lemon Tree, 1st Floor, Sevoke Road, Siliguri, West Bengal - 734008

5.	**SEATED PULLER/PULL CHAIR DIMENSION 1900 mm (Length) x 740 mm (Width) x 1920 mm (Height). SAFE AREA: - 1.2 m x 3 m.** 'Providing and fixing seated puller made from 'A' Class Medium GI Pipe. The centre pipe is of 100mm NB made from 'A' Class Medium GI Pipe and the bottom support of M.S. round plate of 250 mm diameter & 10mm thickness is welded at bottom. The remaining frame is made up of 30mm NB 'A' Class Medium GI Pipe. The handle frame is of 25mm NB 'A' Class Medium GI Pipe. The seat frame is of 30mm NB 'A' Class Medium GI Pipe, for the assembly different bushes are used which is made from seamless pipe of 50mm 00 and 3mm thickness & 50mm solid bar is used. The seats are made up of high-quality FRP material of size 330mm X 330mm of thickness 3mm & M.S. Plate size 250mm X 200mm X 5mm is used to support it. Closing caps made from high-quality FRP material which is of 2mm thickness. The pins used are made up of 17mm diameter solid bar. The bearings used are of '6203' permanent lubricated sealed bearing of reputed make. The nut bolts used for assembly are made from S.S. material. The circlips used for assembly are of 17mm diameter. The equipment is fixed on ground with cement concrete and J shaped welded bolts of 18 mm thickness and painting is done by attractive colour spraying after proper surface treatment, shot blasting and initial coat of yellow primer surface is applied before top coat. The top coat is done using the best quality brand paint or duly powder coated. All equipment shall be 3rd party quality certified by International Testing Laboratory Govt. of India approved MSME. Outdoor Gym Equipment must confirm DIN 79000 and EN 16630, CE Certified, I.S.O. 9001:2015 Quality Management System, I.S.O.14001:2014 Environment Management Systems for quality/design standard.	
6.	**CHEST PRESS** DIMENSIONS: - 1900 mm (Length) x 740mm (Width) x1920mm (Height). SAFE AREA: - 1.2 M x 3 M. 'Providing and fixing chest press made from 'A' Class Medium GI Pipe. The centre pipe is of 100mm NB made from 'A' Class Medium GI Pipe, and the bottom support of M.S. round plate of 250 mm diameter & 10mm thickness is welded at bottom. The remaining frame is made up of 40mm NB 'A' Class Medium GI Pipe. The handle frame is made up of 25mm NB 'A' Class Medium GI Pipe. The seat frame is made up of 40mm NB & 50mm NB 'A' Class Medium GI Pipe. For the assembly different bushes are used which is made from 50mm with 3mm thickness seamless pipe & 50mm solid bar is used. The seat is fitted on the outer frame is made up of high-quality FRP material of size 330mm X 330mm of thickness 3mm & M.S. Plate of thickness 5 mm and Size 250mm X 200mm is used to Support it. Closing Caps are made from top quality FRP material which is of 2mm thickness. The pins used are made up of 25mm & 17mm diameter solid bar. The bearings used are of '6205' & '6203' permanent lubricated sealed bearing of reputed make. The nut bolts used for assembly are made from S.S. material. The circlips used for assembly is made up of 25 mm & 17mm dia. The equipment is fixed on ground with cement concrete and J shaped welded bolts of 18 mm thickness and painting is done by attractive colour spraying after proper surface treatment, shot blasting and initial coat of yellow primer surface is applied before top coat. The top coat is done using the best quality brand paint or duly powder coated. All equipment shall be 3rd party quality certified by International Testing Laboratory Govt. of India approved MSME. Outdoor Gym Equipment must confirm DIN 79000 and EN 16630, CE Certified, I.S.O. 9001:2015 Quality Management System, I.S.O.14001:2014 Environment Management Systems for quality/design standard.	

YOUTH OF INDIA
सत्यम् ऋतम् बृहत्

+91 78660 03362 | +91 0353-3136868
info@youthofindia.org.in
youthofindia.org.in
Hotel Lemon Tree, 1st Floor, Sevoke Road, Siliguri, West Bengal - 734008

7.	**SHOULDER BUILDER/ARM WHEEL DIMENSIONS: - 900 mm (Length) x 300mm (Width) x 1500 mm (Height).** Providing and fixing Shoulder Builder made from 'A' Class Medium GI Pipe. The Centre Pipe is of 100mm NB made from 'A' Class Medium GI Pipe and the bottom support of M.S. Round plate of 250 mm diameter & 10mm thickness is welded at bottom. The handle movement frame is of 25 NB & 20 NB made from 'A' Class Medium GI Pipe. To Join the centre pipe & handle movement frame seamless pipe of 130mm diameter & 3mm thickness is used. Closing caps made from top quality FRP material which is of 2mm thickness. The pins used are made up of 25mm diameter bright bar. The bearing used are of '6201' & '6205' permanent lubricated sealed bearing of reputed make. The nut bolts used for assembly are made from S.S. material. The circlips used for assembly is of 25mm diameter. The Polyurethane plastic bush is used for handling. The equipment is fixed on ground with cement concrete and J shaped welded bolts of 18 mm thickness and painting is done by attractive colour spraying after proper surface treatment, shot blasting and initial coat of yellow primer surface is applied before top coat. The top coat is done using the best quality brand paint or duly powder coated. All equipment shall be 3rd party quality certified by International Testing Laboratory Govt. of India approved MSME. Outdoor Gym Equipment must confirm DIN 79000 and EN 16630, CE Certified, I.S.O. 9001:2015 Quality Management System, I.S.O. 14001:	
8.	**CROSS TRAINER/ ELLIPTICAL EXERCISER** 1200mm (Length) x 500mm (Width) x 1200 mm (Height). 'Providing and fixing cross trainer made from 'A' Class Medium GI Pipe. The Centre Pipe is of 80mm NB made from 'A' Class Medium GI Pipe, and the bottom support of M.S. Round plate of 250mm diameter & 10mm thickness is welded at bottom. The Handle Frame is made up of 25mm NB 'A' Class Medium GI Pipe MS Round Pipe. To Join the Centre pipe & handle Frame Seamless Pipe of 50mm 00 & 3mm Thickness is used. For the movement, Bushes are used & for it 60mm 00 & 3mm thickness. The footrest is made from FRP/C.I./Aluminium casting material, its sizes are 130mm X 300mm & 5mm thickness M.S. plate of 280 mm x 130 mm x 5 mm thickness is used. Closing Caps made from top quality FRP material which is of 2mm thickness. The Pins used is made up of 25mm diameter hardened bright bar. The Bearings used are of '6205' permanent lubricated sealed bearing of reputed make. The handles used for cross trainer are of Rubber grip. The Nut Bolts used for assembly are made from S.S. material. The equipment is fixed on ground with cement concrete and J shaped welded bolts of 18 mm thickness and painting is done by attractive colour spraying after proper surface treatment, shot blasting and initial coat of yellow primer surface is applied before top coat. The top coat is done using the best quality brand paint or duly powder coated. All equipment shall be 3rd party quality certified by International Testing Laboratory Govt. of India approved MSME. Outdoor Gym Equipment must confirm DIN 79000 and EN 16630, CE Certified, I.S.O. 9001:2015 Quality Management System, I.S.O. 14001:2014 Environment Management Systems for quality/design standard.	
9.	**TRIPLE TWISTER DIMENSIONS: 1700 mm (Length) x 540 mm (Width) x 1250 mm (Height). SAFE AREA: 3 M x 1 M.** Triple Twister equipment made from 'A' Class GI pipe of different NB. NB stands for Nominal Bore Sizes i.e. internal Diameter of pipe in millimetres. The Centre Pipe is of 100mm NB made from 'A' Class G.I. Round Pipe. The M.S. round plate of 250 mm & 10mm thickness is welded at bottom. The standing frame of the Double twister is of 32 NB made from 'A' class G.I. pipe. The handle frame of double twister is 25 NB. The Twister plate fitted on the standing frame is made up of M.S. Round Plate of size 300mm diameter and 10mm thickness. The equipment is fixed on ground with cement concrete and J shaped welded bolts of 18 mm thickness and Closing caps made from top quality Fiber reinforced Plastic material which is of 2mm thick. The Pins used are made up of 25mm MS bright material. The bearings used are of 6205zz permanent lubricated sealed bearing of reputed brand (FAG/SKF). High tensile steel with galvanized nuts & bolts are used for assembly. The powder coating done with Pure Polyester powder with 60-to-70-micron thickness. All equipment shall be 3rd party quality certified by International Testing Laboratory Govt. of India approved MSME. Outdoor Gym Equipment must confirm DIN 79000 and EN 16630, CE Certified, I.S.O. 9001:2015 Quality Management System, I.S.O. 14001:2014 Environment Management Systems for quality/design standard.	

+91 78660 03362 | +91 0353-3136868
info@youthofindia.org.in
youthofindia.org.in
Hotel Lemon Tree, 1st Floor, Sevoke Road, Siliguri, West Bengal - 734008

10.	**ROWER Dimension: 1200 mm (Length) x 1000 mm (Width) x 920mm (Height)** Safe area: 1.5 m x 1.5 m 'Providing and fixing rower made from 'A' Class Medium GI Pipe. The Main frame is of 80mm X 40mm & 40mm X 40mm CRC Pipe with 2mm thickness. The handle frame is of 25 NB made from 'A' Class Medium GI Pipe. To join the movement frame to main frame seamless pipe of 50mm diameter & 3mm thickness is used. The seats which are fitted on the main frame is made up of high-quality FRP material of size 330mm X 330mm of thickness 3mm & M.S. plate of size 250mm X 200mm X 5mm is used to support it. Closing caps are made from top quality FRP material which is of 2mm thickness. The pins used are made up of 17mm diameter hardened bright bar. The bearings used are of '6203' permanent lubricated sealed bearing of reputed make. The handles used are of Rubber grip. The nut bolts used for assembly are made from S.S. material. The bushes (Stopper) used to avoid the collusion made from Polyurethane Plastic material of 50mm dia. The circlips used for assembly is of 17mm dia. The equipment is fixed on ground with cement concrete and J shaped welded bolts of 18 mm thickness and painting is done by attractive colour spraying after proper surface treatment, shot blasting and initial coat of yellow primer surface is applied before top coat. The top coat is done using the best quality brand paint or duly powder coated. All equipment shall be 3rd party quality certified by International Testing Laboratory Govt. of India approved MSME. Outdoor Gym Equipment must confirm DIN 79000 and EN 16630, CE Certified, I.S.O. 9001:2015 Quality Management System, I.S.O.14001:2014 Environment Management Systems for quality/design standard.	
11.	**SIGN BOARD Size: 0.91 x 0.61m** with support length of 3000 mm. including manufacturing, supplying, and fixing of retro reflective sign boards made of 2mm thick aluminium sheet face to be fully covered with high intensity encapsulated type heat activated retro reflective sheeting confirming to type – I of ASTM-D 4956-01 in green and silver white including subject matter, message bilingual, Symbol, and borders etc as per IRC : 67-2001, pasted on substrate by an adhesive backing which shall be activated by applying heat and pressure confirming to class – 1 of ASTM-D- 4956-01 and fixing the same with suitable sized aluminium alloy rivets @ 20cm c/c to back support frame of m/s angle iron of size 35x35x5 mm and m/s flat of 25x5 mm along with the theft resistant measures, mounted and fixed with 2 nos. clamp of m/s flats of size 25x5 mm to a vertical post of 3 m height made up of m/s pipe of 60 mm n.b. welded with two hold fast of m/s angle 25x25x3mm of 30 cm length each at bottom and including making holes in pipes, angles, providing & fixing m/s message plate of required shade and of approved brand and manufacture over a priming coat of zinc chromate yellow primer (vertical post to be painted in black/white/grey colour). Backside of aluminium sheet to be painted with two or more coats of epoxy paint over an appropriate priming coat including all leads and lifts etc. complete as per drawing, specification, and direction of Officer-in-Charge. All equipment shall be 3rd party quality certified by International Testing Laboratory Govt. of India approved MSME. Outdoor Gym Equipment must confirm DIN 79000 and EN 16630, CE Certified, I.S.O. 9001:2015 Quality Management System, I.S.O. 14001:2014 Environment Management Systems for quality/design standard.	